Temporary Fence

Product Catalog

BONI TECH

Your Reliable Partner

We are a manufacturer-direct source of fence and construction materials, offering a one-stop-supplier used in the commercial, residential, and light industrial fields etc.

Phone. +86 133-833-17223

Add. HuangCheng Industrial Zone, Hebei, China

Web. www.plmesh.com

Email. info@plmesh.com

Copyright @ BONI Technology Co., Ltd

Temporary Fencing for Australia & New Zealand

Strongest & Most flexible temporary fencing with fence panels, fence feet and associated accessories are ideal solution to perimeter security, including construction sites, private sites and demolition sites.

FEATURES & BENEFITS

Full Welding & Hand Welding

Skilled worker 360° hand welding for optimum strength & stability.

Comply with Australia Standards

According to AS 4687-2007 Temporary Fencing and Hoarding standard for Australian markets.

Tested & Certified to Australian Standard AS4687–2007 Temporary Fencing & Hoardings

Withstand Harshest Environments

Pre-galvanized or hot dipped galvanized finish for most durability even in harshest environments.

Lightweight Plastic Feet

Independent production of plastic feet with concrete inserted for easy installation and storing.

Large Stocks for Emergent Order

Clean and tidy warehouse for standard specification fences for customers' order.

5 Years Plastic Feet Guarantee

3 to 5 types of anti-ultraviolet Agents added for excellent UV resistance and anti-aging performance.

TECHNICAL DETAILS

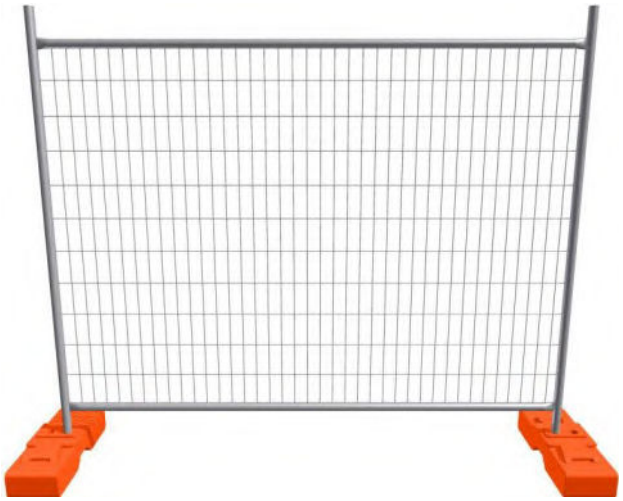

Econo Fence Panel

Panel Size: 2400 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 1.5 mm thickness.

Zinc Coating: 42 microns.

Infill Mesh: 3 mm horizontal, 3 mm vertical.

Aperture Spacing: 150 mm × 60 mm spacing.

Surface Treatment:
Pre-galvanized 42 microns.
Hot-dipped galvanized 90 microns.

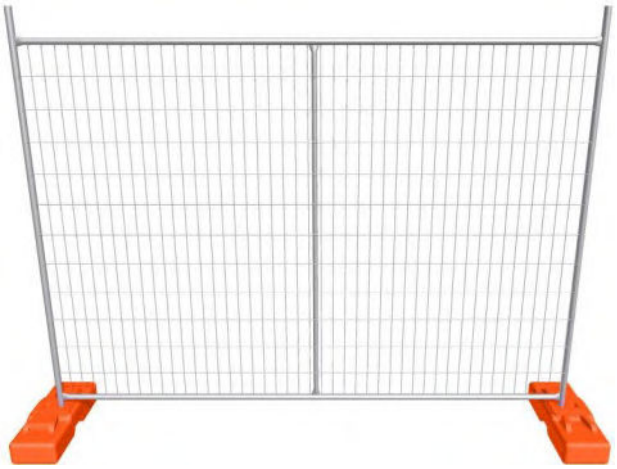

Heavy Duty Panel

Panel Size: 2650 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 2.0 mm thickness.

Infill Mesh: 4 mm horizontal, 4 mm vertical.

Aperture Spacing: 150 mm × 60 mm spacing.

Zinc Coating: 42 microns.

Surface Treatment:
Pre-galvanized 42 microns.
Hot-dipped galvanized 90 microns.

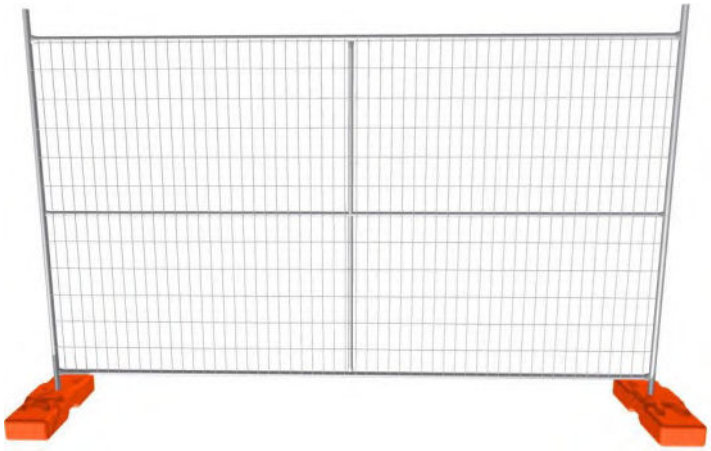

Custom Panel specification Ⅰ – Extra large

Panel Size: 3300 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 2.0 mm thickness.

Infill Mesh: 4 mm horizontal, 4 mm vertical.

Aperture Spacing: 150 mm × 60 mm spacing.

Surface Treatment:
Pre-galvanized 42 microns.
Hot-dipped galvanized 90 microns.

TECHNICAL DETAILS

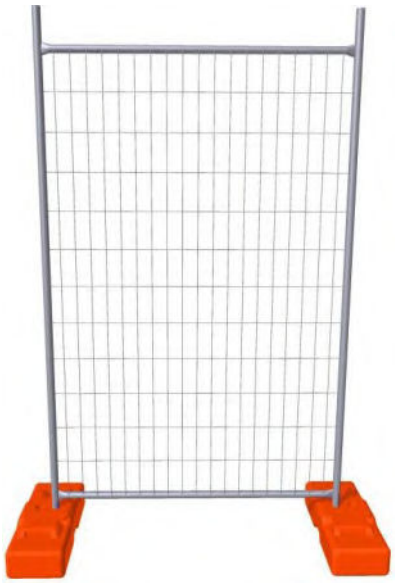

Custom panels specification Ⅱ – Half Panels

Panel Size: 1200 mm (L) × 2100 mm (H).

Frame Size: 32 mm O.D. × 1.5 mm thickness.

Infill Mesh: 3 mm horizontal, 3 mm vertical.

Aperture Spacing: 150 mm × 60 mm spacing.

Surface Treatment:
Pre-galvanized 42 microns.
Hot-dipped galvanized 90 microns.

Suitable applications:
Gate or next to gates or where a smaller panel is more suitable to your needs

ASSOCIATED ACCESSORIES

Plastic feet

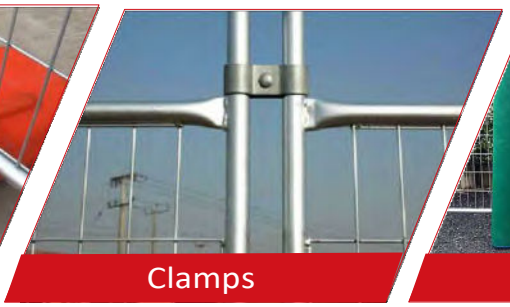
Clamps

Shade cloth

Razor wire & Barbed wire

Handrails

Fence gate

Dog bars

Bracing